

Materialprüfungsamt Nordrhein-Westfalen

Prüfen • Überwachen • Zertifizieren

**Certificate of Constancy of performance
0432-CPR-00007-12**

Version 02

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

Self-locking panic exit devices ASSA ABLOY

panic exit devices operated by a horizontal bar for single leaf doors
as detailed and classified on annex 2,

produced by or for

ASSA ABLOY Sicherheitstechnik GmbH

Bildstockstr.20
D - 72458 Albstadt

and produced in the manufacturing plant(s)

see annex 1


This certificate attests that all provisions concerning the assessment and verification of constancy of performance and the performances described in annex ZA of the standard(s)

EN 1125:2008under **system 1** are applied and that**the product fulfils (products fulfil) all the prescribed
requirements set out above.**

This certificate was first issued on 15.09.2015 and will remain valid as long as the test methods and/or factory production control requirements included in the harmonised standard, used to assess the performance of the declared characteristics, do not change, and the product, and the manufacturing conditions in the plant are not modified significantly, or latest on 15.09.2020.



Dortmund, 13.10.2015

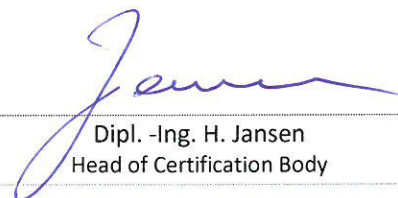

Dipl. -Ing. H. Jansen
Head of Certification Body

This Certificate consists of 1 page and 3 annex(es).

This Certificate replaces the Certificate no. 0432-CPR-00007-12, version 01 dated
15.09.2015.



The original of this document was issued in German language. In case of doubt only the

German version is valid.

Self-locking panic exit devices ASSA ABLOY

Manufacturing plants

Product	Manufacturing plants
locks	<p>ASSA ABLOY Sicherheitstechnik GmbH Werk Albstadt Bildstockstr. 20 D-72458 Albstadt DO 22.0</p> <p>-----</p> <p>Abloy Oy Wahlforssinkatu 20 FIN-80101 Joensuu Finland DO 6.7</p>
bars	<p>ASSA ABLOY Sicherheitstechnik GmbH Werk Albstadt Bildstockstr. 20 D-72458 Albstadt DO 22.0</p> <p>-----</p> <p>HEWI Heinrich Wilke GmbH Prof.-Bier Str.1-5 D-34442 Bad Arolsen DO 20.13</p> <p>-----</p> <p>GfS Gesellschaft für Sicherheitstechnik mbH Tempowerkring 15 21079 Hamburg</p>

Materialprüfungsamt Nordrhein-Westfalen

Prüfen · Überwachen · Zertifizieren

Panic exit devices according to DIN EN 1125 for single leaf doors

Panic exit devices

locks

Item No.	VS-type	Function	Backset	Distance	Forend width	Classification										bar
						3	7	6	B	1	3	2	W	A	B	
309X ^{b)}	B	Funktion I	30, 35, 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
329X ^{b)}	B	Funktion I	30 bis 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
409X ^{b)}	B	Funktion I	30, 35, 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
509X ^{b)}	B	Funktion I	30, 35, 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
529X ^{b)}	B	Funktion I	30 bis 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
609 ^{b) c)}	B	Funktion I	30 bis 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
629X ^{b) c)}	B	Funktion I	30 bis 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	0	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
709X ^{b)}	B	Funktion II	30, 35, 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	
729X ^{b)}	B	Funktion II	30 bis 45 mm 55 bis 100mm	92 mm PZ 94 mm RZ 72mm PZ 74mm RZ	≥ 20 mm	3	7	6	B	1	3	2	W	A	B	1, 2, 3
						3	7	6	0	1	3	2	2	B	B	

b) All kinds of cylinders do not have influence on the escape function of the lock.

c) Combination with special striking plate "Mediator" (Linear door opener Model 65xx) is allowed.

drk: indicates the valid combination between the lock and the handle.

function I: constantly working escape door function. Opening is always possible over the handle.

function II: splitted follower, constantly working escape door function from the inside. Opening is always possible over the interior handle from the inside. The external handle will be coupled by an electronically device.

Materialprüfungsamt Nordrhein-Westfalen

Prüfen · Überwachen · Zertifizieren

function Va: splitted follower, constantly working escape door function from the inside. Opening is always possible over the interior handle from the inside. The external handle will be coupled or uncoupled by operating the key.

VS-type A: lock for a single or a double leaf door: active or inactive leaf.

VS-type B: lock for a single leaf door.

VS-type C: lock for a double leaf door: only inactive leaf.

Remark: In agreement with the terms of the German building regulation legislation, a lock of VS-type A according to DIN EN 1125 (lock for single leaf doors) can be used also in the active leaf of a double leaf door, if:

- a) the inactive leaf catch is secured against maloperation, and
- b) the passage width of the active leaf is sufficient as escape route width.

Bars

No.	Type	Coding	Classification W
1	Effeff 8000	DO 22.0	1
2	HEWI PS 160XA 30°	DO 30.10	2
3	HEWI PS 111XA 30°	DO 30.10	2
4	GfS e-Bar	-	-



Alternative and additional equipment

Bolt switching contact

Type 031308

Type 031309

Mechatronic striking plate (electric strike)

MEDIATOR modell 65xx. Only in conjunction with locks modell 609 or 629x.