
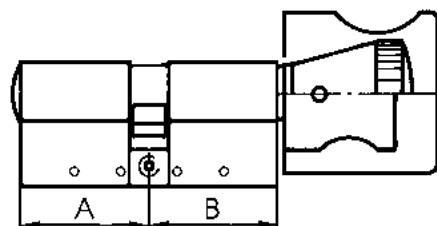


Installation length surcharges for VERSO®CLIQ Double and knob cylinders

Basic cylinder length 61 mm, L= 30/30
Available installation and special lengths



The knob is always located on the cylinder side B

Additional lengths are charged in steps of 10mm, added to the standard length of each side.

Length	
basic length double and knob cylinder	61mm, L=30/30

Customized lengths of double and knob cylinders		
	Standard length	Non-standard length
Total length of cylinder	≤110 mm	> 110 mm and ≤ 240 mm
Extension classification	up to 80mm single side, in 5mm intervals added to standard length	only in 5mm intervals added to standard length

Length L= ../..


A	B
30	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
35	30
	35
	40
	45
	50
	55
	60
	65
	70
	75

A	B
40	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
45	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
50	30
	35
	40
	45
	50
	55
	60

A	B
55	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
60	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
65	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
70	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
75	30
	35
	40
	45
	50
	55
	60
	65
	70
	75
	80
80	30

Installation length surcharges for VERSO®CLIQ Half cylinders

Basic cylinder length 30 mm, L=30
Available installation and special lengths



A
30
35
40
45
50
55
60
65
70
75
80

Additional lengths are charged in steps of 10mm, added to the standard length of each side.

Length	
Basic length half cylinder	30mm, L=30

Overall lengths of half cylinders		
	Standard length	Non-standard length
Total length of cylinder	≤ 80 mm	> 80 mm and ≤ 120 mm
Extension classification	up to 80mm single side, in 5mm intervals added to standard length	only in 5mm intervals added to standard length