


## Mobile PD Quick Guide

The CLIQ Mobile PD (Programming Device) is used for programming CLIQ keys using a supported mobile device, or a computer via USB, where it uses a network connection to connect to a remote CLIQ server.

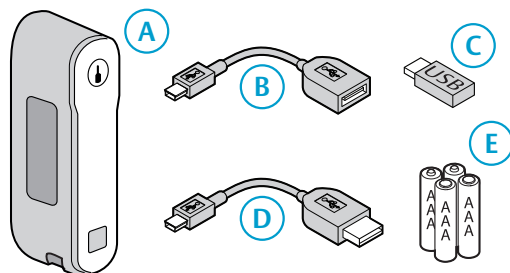

### Item Description

- A Mobile PD
- B USB on-the-go cable<sup>1)</sup> (OTG)
- C USB memory stick<sup>1)</sup> (FAT 32)
- D Mini USB cable<sup>2)</sup>
- E Batteries, AAA, 4 pcs

- 1) Only used during connection setup with iOS devices
- 2) Only used when using a computer to connect to a CLIQ server.

### LED Indicators


LED	Type	Description
	CLIQ system	<b>Blinking:</b> Connecting to CLIQ server. <b>Solid:</b> Connected to CLIQ server.
	Key battery	<b>Blinking:</b> Key battery is low. – Replace battery.
	Communication	<b>Blinking:</b> Searching for key update. <b>Solid:</b> Key update found.
	Download	<b>Blinking:</b> Downloading from CLIQ server. <b>Solid:</b> Finished downloading. – Remove key when Mobile PD beeps.
	Message sent	<b>Solid:</b> Email sent (optional feature).
	Error	<b>Solid:</b> Indicate error.

### Preparing a connection


Before the Mobile PD can be used for the first time either the PD needs to be paired with a mobile device, or connected to a computer with **ASSA ABLOY Network Provider** installed.

The Mobile PD may initiate a self-test when the batteries are inserted. Wait until finished (all LEDs are turned off) before proceeding.

### Option 1: Pairing to an iOS device

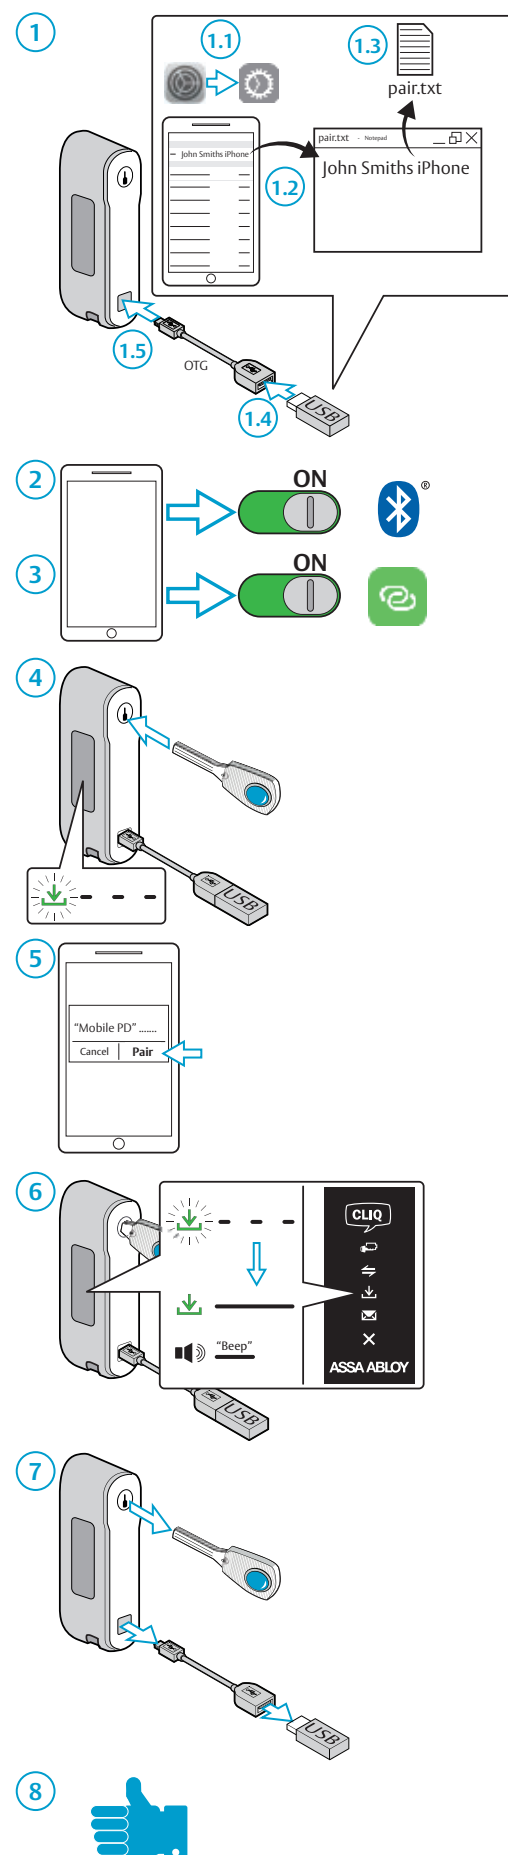

### Option 2: Pairing to an Android device

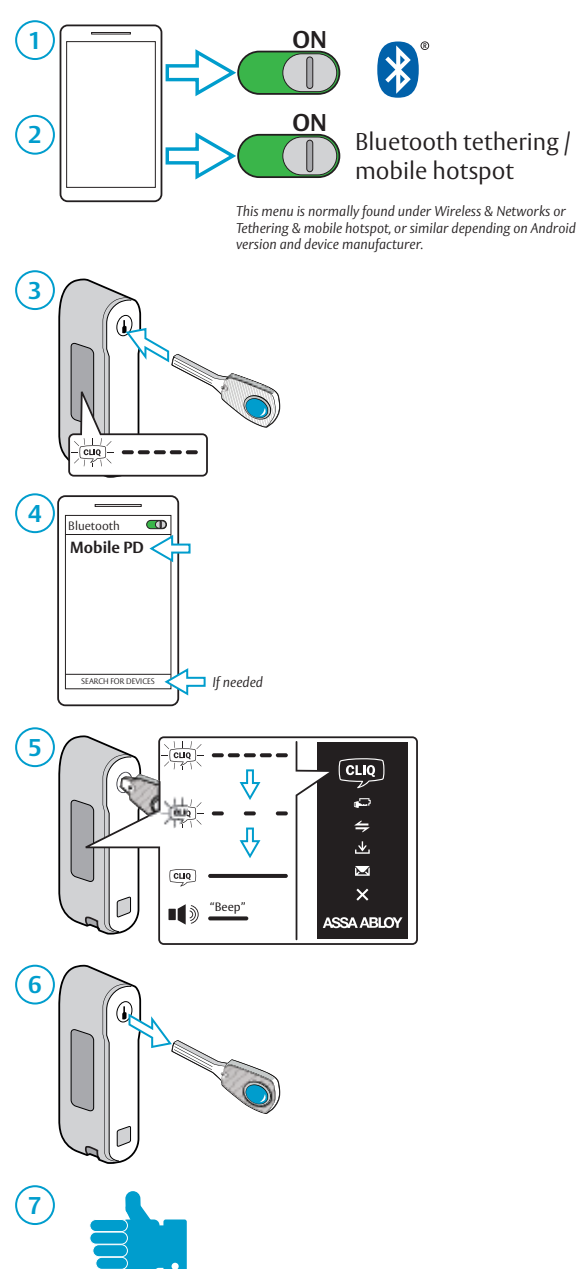

### Option 3: Connecting to a computer

To configure a computer for use with the Mobile PD:

- 1) Make sure that the computer is connected to Internet.
- 2) Install **ASSA ABLOY Network Provider** on the computer.
- 3) Connect the Mobile PD to the computer using a Mini USB cable.

The Mobile PD powers up and tries to connect to the remote CLIQ server. This should take less than a minute. A solid white CLIQ logo indicates that a connection to the remote CLIQ server has been established.


### Using the Mobile PD

Once paired with a mobile device, or connected to a computer, the Mobile PD will automatically connect to the server when a key is inserted.



#### IMPORTANT!

Make sure that **Bluetooth** and **Personal hotspot/Mobile hotspot/Bluetooth tethering** is activated.

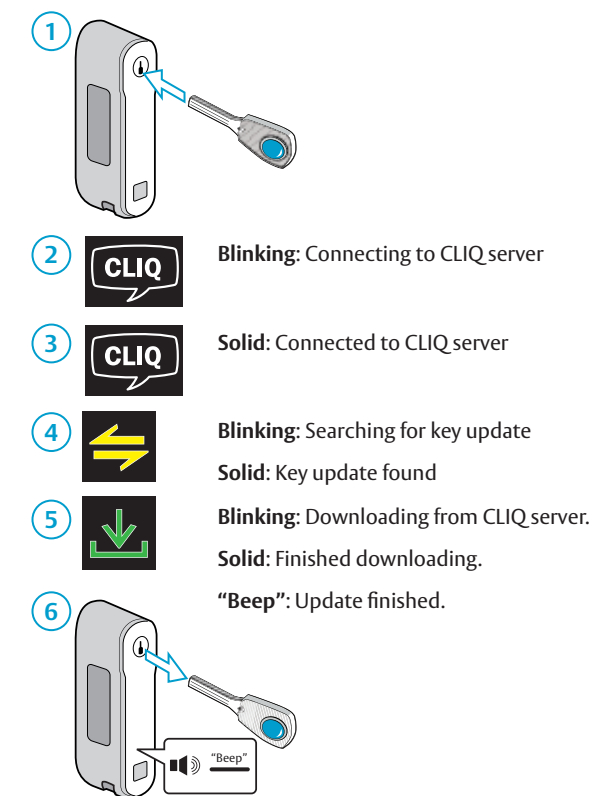

### Troubleshooting

LEDs	Description
	<b>Blinking/blinking:</b> Critically low Mobile PD batteries. – Replace batteries now
	<b>Solid/solid:</b> Failed key update. – Retry, then contact your CLIQ system administrator.
	<b>Solid/blinking:</b> Network connection error. 1. Check the mobile device to make sure that Bluetooth and tethering is turned ON. 2. Check the Internet connection of the mobile device. 3. Restart the mobile device and retry.
	<b>Solid:</b> Pairing issue. – If the Mobile PD fails to find the iPhone named in the pairing file, it will time out after about ten seconds and light the red error LED. Verify the name in the "pair.txt" file, any non-standard characters (i.e. ` etc) in the phone name should be removed. – If asked during Bluetooth pairing, enter the PIN: 1234.

If the error persists, contact support.