

Concealed door closer with Cam-Motion® technology and small standard concealed guide rail G892 or standard concealed guide rail G893

Concealed door closer with Cam-Motion® technology and guide rail

Product description

- Concealed door closer with Cam-Motion® technology and small standard concealed guide rail G892 or standard concealed guide rail G893
- Fulfils barrier-free building requirements (EA / CEN TR 15894)
- Certified in compliance with EN 1154, size 1-4
- Suitable for fire and smoke protection doors
- For single action doors up to 1100 mm wide

Overview of Advantages

- Can be used for left and right-handed doors
- Closing speed and latching speed adjustable from top facing regulating valves
- Built-in backcheck
- Thermodynamic valves for consistent performance
- Opening angle up to 120°
- Large range of applications
- Versions with 4 mm and 8 mm spindle extensions
- Standard colours: silver EV1

Note

- Additional verification of suitability required for the respective fire or smoke protection door

Characteristics of standard guide rail G892

- Small size guide rail, can be used with hold-open device and opening damper
- For standard applications
- Installation dimensions: see diagram

Characteristics of guide rail G893

- Guide rail suitable for equipping with hold-open device and opening damper
- Installation dimensions: see diagram (dimensions in brackets)

Accessories/Individual parts


- Concealed standard guide rail G892 Silver EV1 DCG892-----EV1-
- Concealed guide rail G893 Silver EV1 DCG893-----EV1-
- Hold-open device A152 For Guide Rails G193/G195/G893 DCA152-----
- Opening damper A153 For Guide Rails G193/G195/G795/G893 DCA153-----
- Hold-open device A156 For Guide Rail G892 DCA156-----
- Opening damper A157 For Guide Rail G892 DCA157-----
- Mounting plate A162 For Door Closer Models DC840/DC860, galvanised DCA162-----40

The advantages at a glance

Customer segment	Advantages
Project planners	Extensive range of uses: Fire and smoke protection doors as well as standard doors Fulfils barrier-free building requirements (EA / CEN TR 15894) Comprehensive functions, standard or optional
Builders	Quick and easy installation Quickly and easily adjustable Suitable for left and right handed doors
Trade	Reduced inventory costs due to modular product range One single product suitable for a large variety of mounting positions Complementary accessories available for the whole product range
User	Easier door opening and improved accessibility due to rapidly decreasing torque Largely unaffected by temperature fluctuations because of thermodynamic valves

Technical data

Closing force	EN 1-4
Door width up to	1.100 mm
Handing	Left / right handed
Max. door opening angle	ca. 120°
Closing speed	Variable 120° - 7°
Latching speed	Variable 7° - 0°
Certified in compliance with	EN 1154

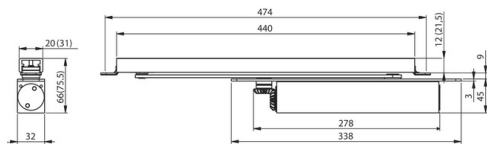

DC840

Concealed door closer with Cam-Motion® technology and small standard concealed guide rail G892 or standard concealed guide rail G893

Length	278 mm
Height	45 mm
Depth	32 mm
Suitable for fire doors	Yes
CE marking for building products	Yes
Color	Silver EV1
Article number	DC840-----EV1-
EAN-Number	4042203436909