


# C100 SCAND

Metal single knob cylinder Scandinavian Profile - for use in indoor Areas

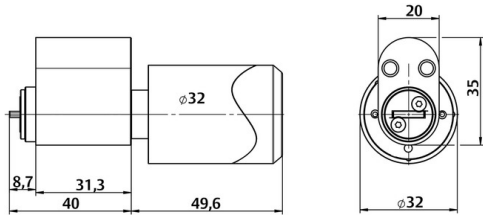

## Product description

- Communication from hub via RS485 bus to the Online Access Control System (addressable) - access decision in the EAC system
- Compatible with all Scandinavian mortice locks - in wooden, steel and tubular-frame doors
- Main electronics (RFID + radio) in the outside knob - secure electronics inside cylinder core
- Freely rotating lock cam
- Override Credentials: Up to 10 override credentials can be stored for an emergency access in case of failure or no communication with the access control or the hub.
- Smart Credential Handling: In addition to the override credentials, the last valid credentials (up to 1000) can be cached automatically and for a limited time (up to 30 days), so that an opening can still be made without the intervention of the administrator.
- LED for status visualisation

## Scope of delivery

- 1 single knob cylinder with battery (Lithium CR2) and installation instructions
- Screws and fixing material (In V3 orders you need to order knob tool separately)

## Note

- \* It should be observed that harsh environments may affect product operability (excessive humidity, salt, extreme temperatures)









## Suitable ASSA ABLOY products

- Aperio 1 to 8 communications hub
- AH20 1-to-1
- AH40 1-to-16 IP

## Accessories/Individual parts

- Aperio PAP tool and wireless dongle 99 04\_PAP tool
- Spare battery 99 0x\_Battery
- Knob sleeve KnobSleeve

## Technical data - Metal single knob cylinder

	<b>Approvals</b>	CE
	<b>Knob dimensions</b>	43 x 32 mm (L x Ø)
	<b>Knob surface</b>	Stainless steel
	<b>Battery</b>	1 x Lithium CR2
	<b>Battery life</b>	10 openings per day for 27 months
	<b>Radio standard</b>	IEEE 802.15.4 (2.4 GHz)
	<b>Encryption (radio communication)</b>	AES 128 bits
	<b>Distance between the RFID-Reader and hub</b>	Typical range 25 m depending on the hub type and building environments
	<b>Class of protection</b>	IP 65*
	<b>Operating temperature range</b>	-20° to +55°C
	<b>Status</b>	LED (red/green/orange)
	<b>RFID Technologies (Based on reader type)</b>	High Frequency: iCLASS®/ISO 14443B; MIFARE Classic® / MIFARE® DESFire® EV1&EV2;  Legic: LEGIC® (Advant, Prime, ISO/IEC14443 UID, ISO/IEC15693 UID); Optional MIFARE® Support
	<b>RFID reading</b>	UID / Sektor / Block / Application / File
	<b>RFID Reading range</b>	< 4 cm
	<b>Communication interfaces</b>	Micro USB Firmware download (V3 only)