


*NO TRANSLATION: aP Türterminal Modell 1380- 12

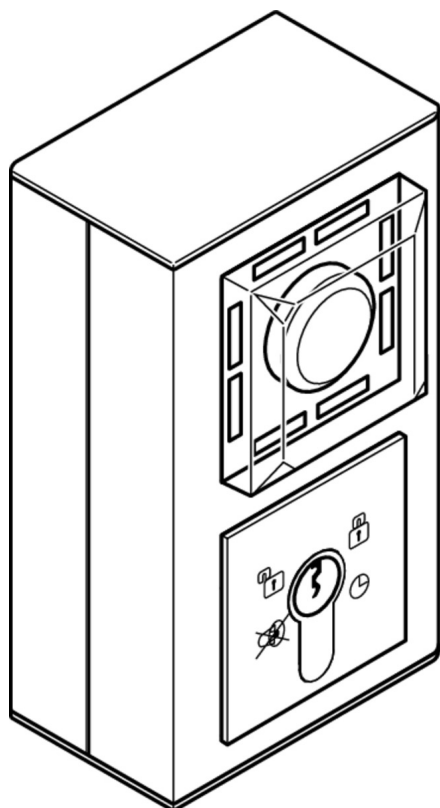

Product description

An operating unit to release doors in direction of escape in conjunction with external escape door control unit.

Emergency button

- Emergency button lights up; features reusable, non-detachable, shatterproof protective cover
- Integrated visual door status indicator with high-performance LEDs (green / red / yellow) signalling unlocked / locked / alarm status
- Emergency button sign (arrow pointing downwards)

Key switch module

- For locking/unlocking, temporary unlocking, alarm resetting
- With Euro profile half cylinder, including 3 keys
- Cover which matches the corresponding switch fitting

Note

- Gira Profil 55, aluminium finish

Technical data

Input operating voltage	12-24 V DC
Total power consumption	0.09 A at 24 V DC
Control	No, external escape door control unit required
Emergency switch	Yes
Control element	Key switch with Euro profile cylinder; cam position 8 x 45°; 30.5 mm long
LED display	Yes (red, green, yellow)
Buzzer	Yes
Sabotage switch	No
Operating temperature range	0 °C to +40 °C
Class of protection	IP 30
Dimension	In double, surface-mounted module, Gira Profile 55 fitting

Article number	1380-12-7--3500
----------------	-----------------

