


ePED® terminal, surface-mounted with illuminated pictogram

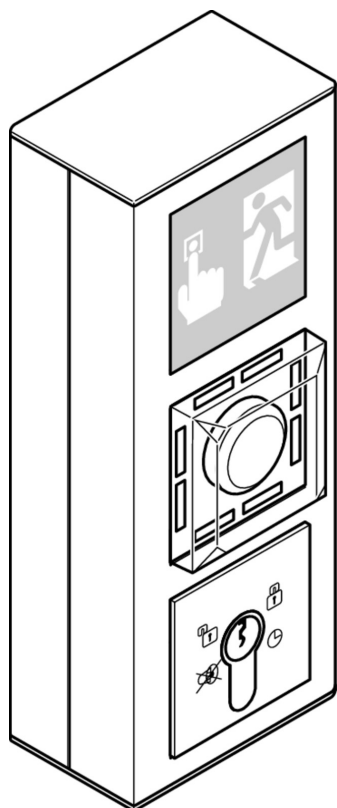

Product description

For use without time delay, with 4-wire bus cabling in Hi-O technology.

With emergency open module for the control and monitoring of electrical locking elements for escape routes.

For surface mounting with manufacturer-specific covers and housing.

Consists of: illuminated pictogram; emergency open module; key switch module

Accessories/Individual parts

- Illuminated information pictogram module for escape routes Illuminated pictogram 1386D00-HW--F90
- ePED® service interface USB Standard for 55 mm modules 1386D00-----00
- Key switch module model 1385ES3 System 55, Gira E2; pure white gloss 1385ES3-2--0400
- Housing for Model 1385EG3 Triple; Gira Profil 55, pure white 1385EG3-7--0400
- Housing for Model 1385EG3 Triple; Gira Profil 55, aluminium finish 1385EG3-7--3500

Technical data

| | |
|---|---|
| Current consumption 24 V DC | 145 mA |
| Control | Yes, Hi-O technology |
| Function indicator | Yes, integrated |
| Control function | Yes, Hi-O technology |
| Operating and display function | Yes, integrated |
| Connection | 4-wire bus |
| Time delay | No |
| Illuminated pictogram | Yes |
| Display of down counter | No |
| Control element | Key switch with Euro profile cylinder; cam position 8 x 45°; 30.5 mm long |
| Emergency button | Yes, latching |
| Initial configuration | With ePED® service interface and software for MS Windows |
| Required power supply | 24 V (±15 %) DC SELV |
| Operating temperature range | -10 °C – +55 °C |
| Area of application | For indoor use |
| Class of protection | IP30 (wenn vollständig montiert) |
| Installation | Surface fitting |
| Dimension | 3 gang housing |
| Inputs | 2 |
| Sabotage switch | Yes |
| Outputs | 1 x 30 V / 1 A switchover contact |
| Amount of bus addresses | 2 |
| Key switch on opposite side to direction of escape | Yes (without display) |
| Certified in compliance with | EltVTR; DIN EN 13637:2015 |
| Escape door terminal with bi-directional escape route | Yes |
| Article number | 1386-12B7--0400 |