


ePED® terminal, flush-mounted with time delay and illuminated pictogram included 1386S00UP

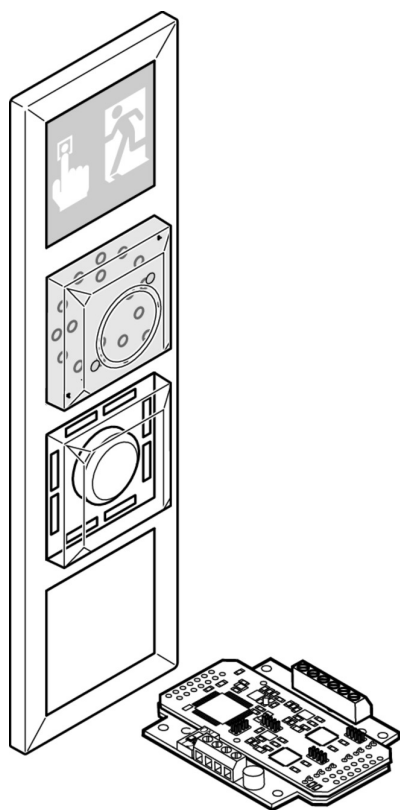

Product description

For use with time delay, with 4-wire bus cabling in Hi-O technology.

With emergency open module for the control and monitoring of electrical locking elements for escape routes.

The time delay is tested according to the requirements of DIN EN 13637:2015 (electrically controlled exit systems for use on escape routes) as per EN 61508 Safety Integrity Level 2 (SIL2).

Time delay applications are subject to local Building Regulations. Additional permissions may be required.

Prepared for external AC system.

With empty position for integration of e.g. a RFID reader of an external AC system.

Connection to door terminal via: SYSCON-5 connection cable

For mounting in DIN switch boxes for light switch systems with manufacturer-specific covers and frames.

Consists of: illuminated pictogram; display release delay; emergency open module; empty position for accepting a RFID reader

With ePED® interface for locks for installation in distribution boxes

Accessories/Individual parts

- Illuminated information pictogram module for escape routes Illuminated pictogram 1386D00-HW--F90
- ePED® release delay display Standard for 55 mm modules 1386D00-Coun-00
- ePED® service interface USB Standard for 55 mm modules 1386D00-----00
- Key switch module model 1385ES3 System 55, Jung AS500, green 1385ES3-1--1800
- Single frame model 1380EF4 Jung AS500 - alpine white 1380EF4-1--0400
- Single frame model 1380EF4 Jung AS500; green 1380EF4-1--1800
- Single frame model 1380EF4 Gira E2 - aluminium finish 1380EF4-2--3500
- Single frame model 1380EF4 Gira Standard 55 - glossy, pure white 1380EF4-3--0400
- Single frame model 1380EF4 Jung LS 990 - alpine white 1380EF4-6--0400
- Single frame model 1380EF4 Jung LS 990 - stainless steel 1380EF4-6353500
- ePED® interface for locks for installation for installation in distribution box 1386S00UP----00

Technical data

Current consumption 24 V DC	325 mA
Control	Yes, Hi-O technology
Function indicator	Yes, integrated
Control function	Yes, Hi-O technology
Operating and display function	Yes
Connection	4-wire bus
Time delay	No
Illuminated pictogram	Yes
Down Counter	Yes
Control element	Via external AC system
Emergency button	Yes, latching
Initial configuration	With ePED® service interface and software for MS Windows
Required power supply	24 V (±15 %) DC SELV
Operating temperature range	-10 °C – +55 °C
Area of application	For indoor use
Class of protection	IP30 (wenn vollständig montiert)
Installation	In DIN switch boxes >= 62.5 mm deep
Dimension	4 gang switch combination
Inputs	2
Sabotage switch	Yes
Outputs	1 x 30 V / 1 A switchover contact

ePED® terminal, flush-mounted with time delay and illuminated pictogram included 1386S00UP



Amount of bus addresses	4
Certified in compliance with	EltVTR; DIN EN 13637:2015
Escape door terminal with bi-directional escape route	Yes
Article number	1386Z1LB1--1850