

High- security handle control 709X701PZX

12-24 V DC; backset 65

Product description

The security lock with handle control 709X is used especially in situations where the advantages of handle-controlled unlocking have to be combined with the mechanical security requirements of the above-mentioned lock models 309X and 409X. The integrated

The bolt is forced back by the engaged external handle and the double action latch is no longer blocked. When the door is closed, the control latch together with the pre-tensioned cross control ensures that the bolt is fully extended and the double action latch blocked which improves the level of security obtained.

The panic side settings and selecting between fail-locked and fail-unlocked can be performed on the lock as required.

Overview of Advantages

- Mechanical automatic locking system
- Mechanical follow up control between double action latch and control latch
- With double action lock, DIN right
- Suitable for fire doors
- Controllable external handle
- Changeover function for unlocking with a key from the outside
- Monitoring functions

Scope of delivery

- 1 piece security lock
- 1 operating manual

Note


- The locks of the model Series 709X have a separate follower and therefore, require an internal handle (or a panic bar) and an external handle.
- The lock is actuated by a card reader, code lock, timer switch, button, etc.

Accessories/Individual parts

- Connecting Cable Model Z09XKAB For model 409X / 509X / 709X; length 10 m (Order number: Z09XKAB-----)
- Angled Striking Plate Model Z09XSBL-01Short; DIN left; for model 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-01----4)
- Angled Striking Plate Model Z09XSBL-01Short; DIN right; for model 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-01----5)
- Flanged Striking Plate Model Z09XSBL-02Universal; with 16 mm flange and limiter edge; for models 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-02----1)
- Angled Striking Plate Model Z09XSBL-03Long; DIN left; for model 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-03----4)
- Angled Striking Plate Model Z09XSBL-03Long; DIN right; for model 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-03----5)
- Universal Flanged Striking Plate Model Z09XSBL-04Universal; with flange 8 mm without ramp angle; for model 309X / 329X / 409X / 509X / 529X / 709X / 729X. (Order number: Z09XSBL-04----1)
- Power supply unit model 100212 V DC regulated; 4.5 A; with wall bracket (Order number: 1002-12-4.5--00)
- Power supply unit model 100224 V DC regulated; 2.5 A; with wall bracket (Order number: 1002-24-2.5--00)
- Power supply unit model 1003-12-1.25Power supply 12 V DC stabilised, 1.25 A, top-hat rail (Order number: 1003-12-1.25-10)

Technical data

Handing	Right-hand
Maximum load microswitch 24 V DC	200 mA
Input operating voltage	12-24 V
Current consumption 12 V DC	480 mA
Current consumption 24 V DC	240 mA
Alternative function	Yes
Panic function	No
Backset	65 mm
Operating temperature range	-20 °C to +60 °C
Bolt throw	20 mm
Handle follower	9 mm
Latch	Double action latch

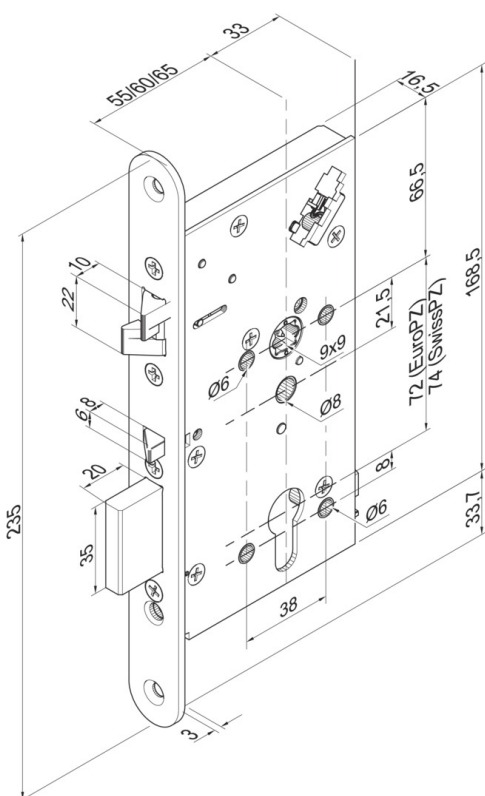

High- security handle control 709X701PZX

12-24 V DC; backset 65

Distance	74 mm
Suitable for fire doors	Yes
Building authorities test certificate	P-120003555
Monitoring contact	Yes
Width face plate	20 mm
Combination door autom.	No
Minimum load capacity of latch bolt	5 kN
Minimum load capacity of bolt	10 kN
Bolt counterpressure	6 kN
<hr/>	
Article number	709X701PZX--G45
EAN-Number	4042203299771