

Electro- multi- point lock 819-32V92F65F9C



Product description

The electric multi-point locking system 819 is a self-locking panic lock with split follower and controllable outside handle. An electronic multi-point lock with a continuous follower and door handle that can be controlled from both sides is also available as a special version. This multi-point lock does not have a panic function!

The outside handle can be temporarily or permanently engaged or disengaged using the electric controls.

The handle controls are based on the fail-unlocked operating principle: if the lock is energised, outside handle is disengaged, i.e. outside handle does not work; if the lock is de-energised, the outside handle is engaged, i.e. outside handle will work.

Thanks to its three hardened lock bolts with a 20 mm throw and automatic self-locking, this multi-point lock meets optimum standards in mechanical security.

The enhanced burglary protection achieved as a result does not affect the performance of the lock function. Requirements for use in fire doors are also met and the lock is also suitable for emergency exits in accordance with DIN EN 179.

Overview of Advantages

- Mechanical automatic locking system
- Mechanical automatic locking process control between latch and control latch
- Burglary-resistant thanks to three solid, hardened bolts with 20 mm throw
- Burglary resistance up to Resistance Class 4 achievable in suitable door systems
- Can be optionally fitted with a fourth bolt, e.g. ceiling-height doors or doors higher than 2.5 m
- Panic function (approval in accordance with DIN EN 179)
- Suitable for fire doors, evidence of conformity in form of general appraisal certificate
- Electrically-controlled outside handle, escutcheon is used with a split handle spindle and outside handle
- Changeover function for unlocking with a key
- Monitoring functions: locked; operation of inside/outside handle and cylinder
- Variant available with integrated escape door strike 331U in striking plate
- Variant available with integrated latch bolt lock 807 in face plate

Scope of delivery


- 1 multi-point lock
- 1 operating manual

Note

- Connecting cable must be ordered separately

Technical data

Handing	Version C
potential	24 V DC
Max. contact rating	25 V / 500 mA
Rated current consumption	270 mA / 120 mA
Connecting cable	10
Width face plate	24 mm
Bolt throw	20 mm
Panic function	Yes
Handle follower	9 mm
Version	Euro profile cylinder
Distance	92 mm
Material faceplate	Chrome-plated steel
Faceplate dimensions	1760 x 24 x 6 mm
Material striking plate	Chrome-plated steel
Dimensions striking plate	1760 x 24 x 6 mm
Class of protection	IP 30
Approval DIN EN 179	Certificate of Constancy of performance 0432-CPR-00007-01
Minimum load capacity of latch bolt	5 kN
Minimum load capacity of bolt	10 kN
Bolt counterpressure	6 kN
Dead bolt features	Hardened steel surface, 60 HRC
Backset	65 mm

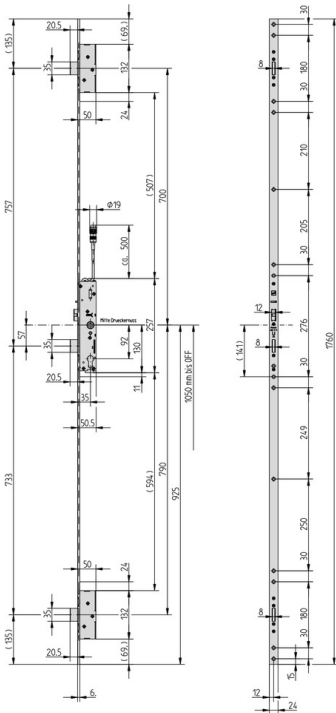

Electro- multi- point lock 819-32V92F65F9C

Article number	819-32V92F65F9C
EAN-Number	4042203462014