



Cylinder padlock eCLIQ N316

With positive locking - without key -

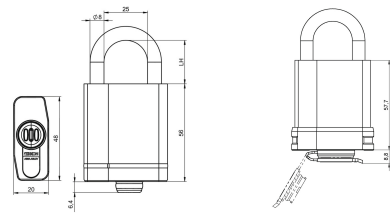

ASSA ABLOY

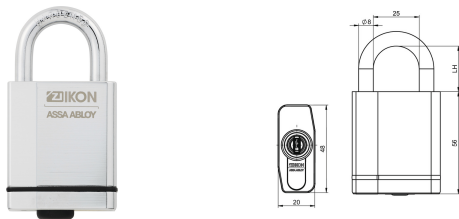

Product description

- Available as electrical version (V=)
- Standard shackle clearance height 25 mm (AUS=LH25)
- Other shackle heights (AUS=LH50, LH75, LH28/5)
- Steel shackle, diameter 8 mm, hardened and chrome-plated
- Steel shackle diameter 5 mm at shackle height 28 mm (AUS=LH28/5), hardened and chrome-plated
- Optionally with non-corroding shackles (AUS=LH25-NIRO)
- Housing chrome-plated in brass
- Cylinder, nickel-plated brass satin
- With positive locking as standard
- Optionally available without controlled locking (AUS2= OHNE ZWANGSSCHL)
- Standard version as per DIN EN 12320 class 3 (not valid for AUS=LH28/5)
- Standard with dust and rain cover (SUR=3) IP55
- Optionally without dust and rain cover (SUR=0)
- Optionally IP67 certified with protective cap (SUR=2)
- Maintenance-free for up to 200,000 cycles
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G EX IB IIB T4)

Scope of delivery

- 1 cylinder padlock

Ordering Information

- Subsequent modification to SUR=2 only available if originally ordered as SUR=0

Suitable ASSA ABLOY products

- Protective cap IP67 1090

Variants that can be ordered

Article number	AUS=	V=	SUR=
N316	LH25	E	3
	LH50	E	3
	LH75	E	3
	LH28/5	E	3
	LH25-NIRO	E	3