Bathroom lock N1001

ASSA ABLOY
Opening Solutions

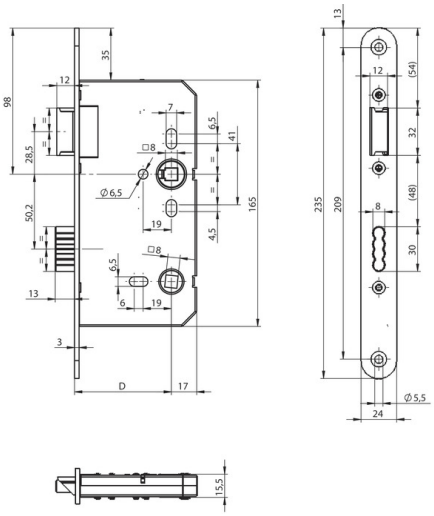

Product description

- OneSystem bathroom lock N1001 for single-leaf standard doors, product-specific environmental product declaration (EPD) in accordance with EN 15804 with article-specific Parameters.

Overview of Advantages

- Environmental product declaration (EPD) in accordance with EN 15804
- Tested for 1,000,000 cycles and 300 kg door weight
- Compliance with EN 12209
- Small rear backset 17 mm
- Continuous screw connection of fittings
- Suitable espagnolette integrated in the striking plate
- 20 mm bolt throw with a single rotation
- Also available as a fire protection version
- Closed lock case
- Latch DIN left/right reversible without tools
- Security fittings and oval roses can be screwed on through the lock
- Stainless steel faceplate
- Deadbolt with anti-tampering design
- Developed for Euro profile cylinder and Swiss round Profile cylinder

Note

- Steel bolt only available for backset 65 and 100 mm. 55, 60 and 80 mm on request.

Technical data

Latch	DIN L
Stulp	R3 x 20 mm
Material striking plate	Stainless steel
Face plate length	235 mm
Width face plate	20 mm
Mounting	Bathroom lock
Panic function	nein
door system	Single-leaf door
Bolt throw	20 mm
Standards	EN 12209
Material faceplate	Stainless steel
Backset	65 mm
Handing	DIN L
Suitable for fire doors	No
Top locking	No
Self-locking system	No
Function	mechanisch
Type of cylinder	no cylinder cutout
Handle follower	8 mm
Distance	78 mm
Monitoring	No
Shape	round
Symmetry	asymmetrical

Article number	N10012008B3000M
EAN-Number	4042203569836

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20 72458 Albstadt albstadt@assaabloy.com
Tel. + 497431 123-0 Fax + 497431 123-240 www.assaabloyopeningsolutions.de